

SATA

换向器 Gearbox





掃碼進入更多選型

AT065 - L - 1 - S2

型號
Model

形式
Form

減速比
Reduction ratio


軸帶鍵槽
Shaft with key

L : 雙輸出軸
Two output shafts
L1 : 左輸出軸
Left output shaft
R1 : 右輸出軸
Right output shaft


S1: 無鍵
without key
S2: 有鍵
with key

產品規格 Product specifications	AT065-L-1-S2
減速比 Reduction ratio	1:1
額定輸出力矩 Rated output torque	25 N.m
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque
額定輸入轉速 Rated input speed	3000 rpm
容許徑向力矩 Allowable radial force	900 N
容許軸向力矩 Allowable axial force	450 N
回程間隙 Return clearance	≤ 6 arcmin
使用壽命 service life	> 20000 h
使用溫度 Service temperature	-10°C~80°C


AT065-L-1-S2

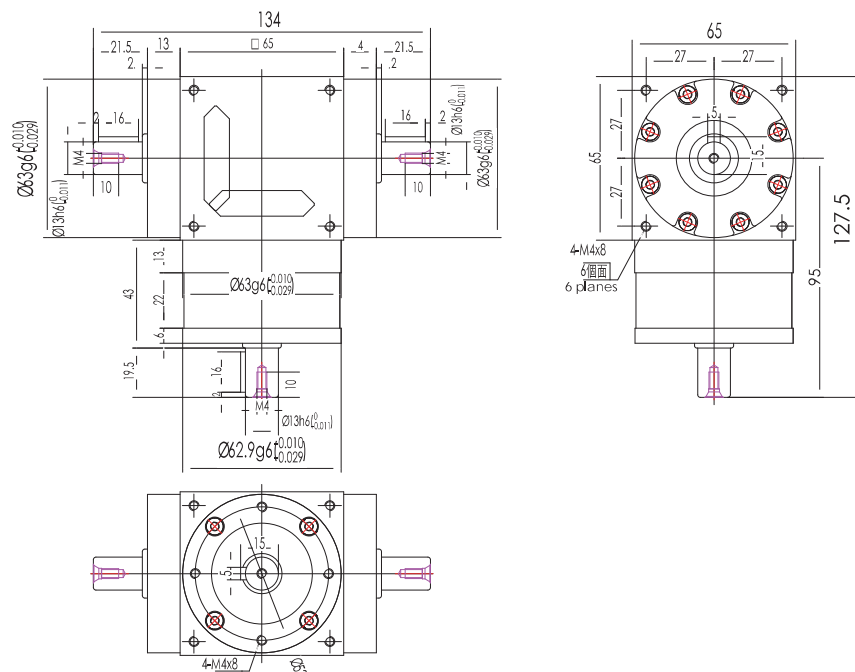

AT065-L1-1-S2

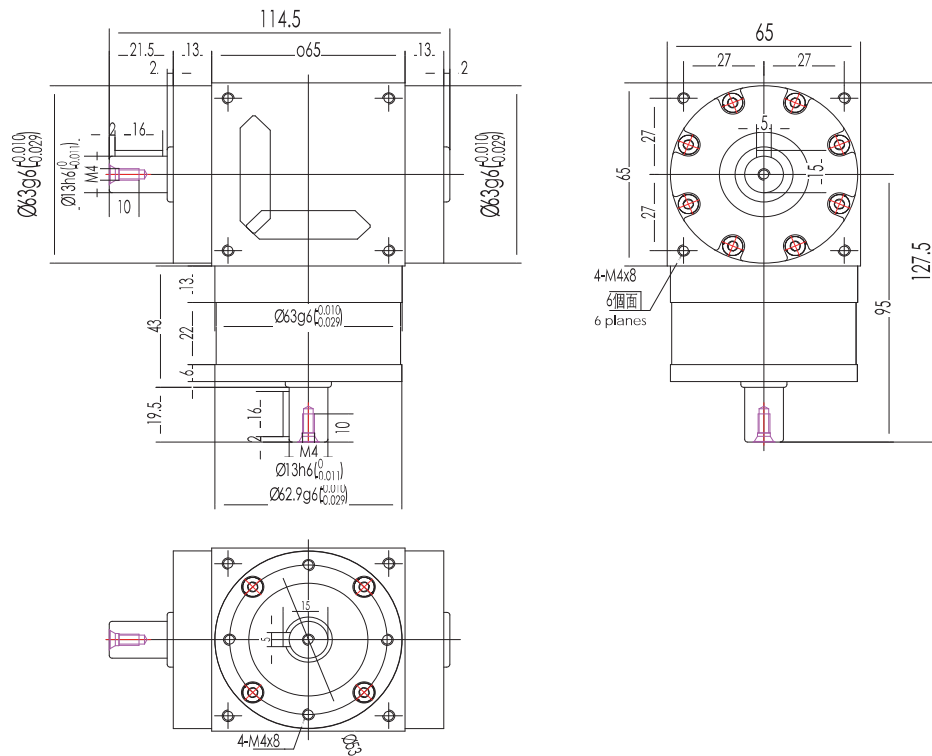

AT065-R1-1-S2

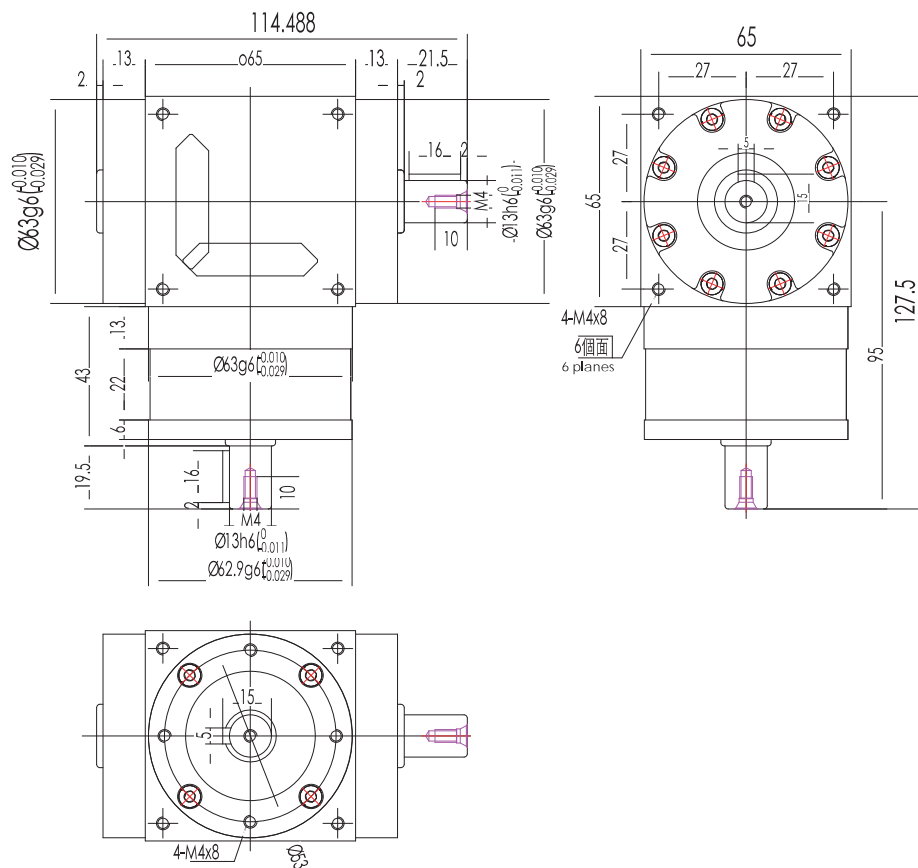



掃碼進入更多選型

AT065 - FL - 3 - S2 - M200W

型號
Model

形式
Form

減速比
Reduction ratio

軸帶鍵槽
Shaft with key

馬達廠牌及出力
Motor brand and output


FL :附星型減速機雙輸出軸
Attached star reducer dual output shaft
FL1 :附星型減速機單輸出軸
Attached star reducer single output shaft
FH :附星型減速機孔輸出式
Attached star reducer hole output type

S1:無鍵
without key
S2:有鍵
with key


H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

產品規格 Product specifications	AT065-FL-3-S2-M200W	
減速比 Reduction ratio	3,4,5,7,10	12~100
額定輸出力矩 Rated output torque	25 N.m	
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque	
額定輸入轉速 Rated input speed	3000 rpm	
容許徑向力矩 Allowable radial force	900 N	
容許軸向力矩 Allowable axial force	450 N	
回程間隙 Return clearance	≤6 arcmin	
使用壽命 service life	> 20000 h	
使用溫度 Service temperature	-10℃~80℃	


AT065-FL-3-S2-M200W

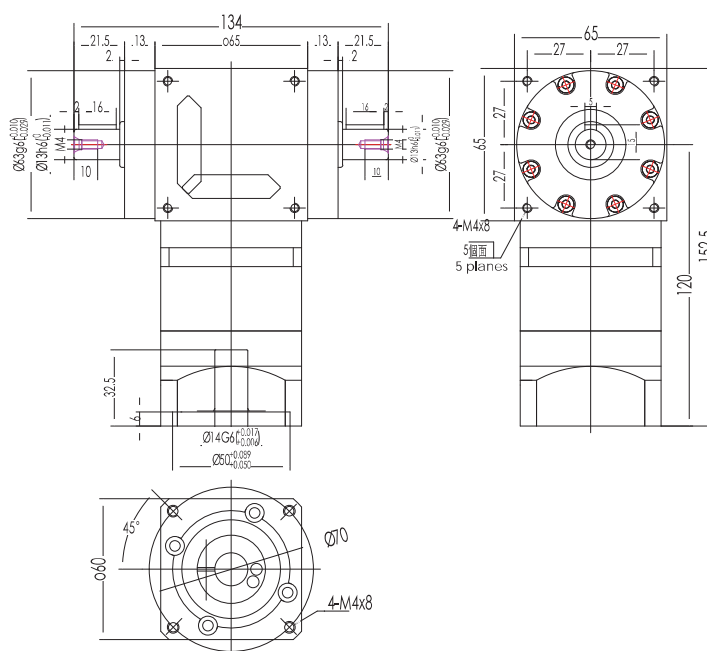


AT065-FL-12-S2-M200W

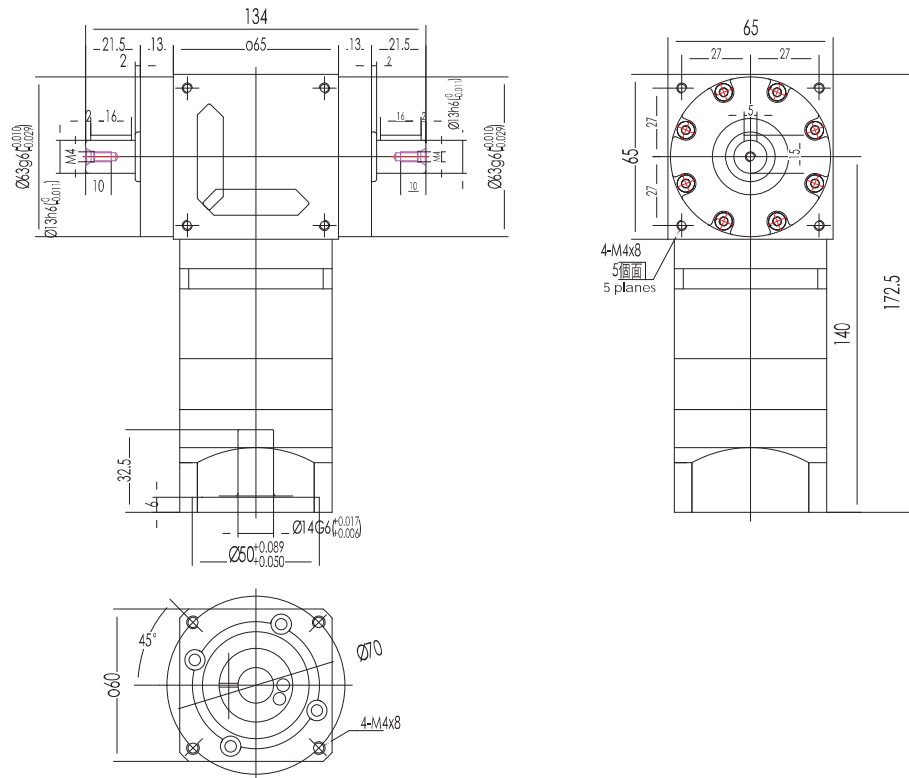


AT065-FL1-3-S2-M200W

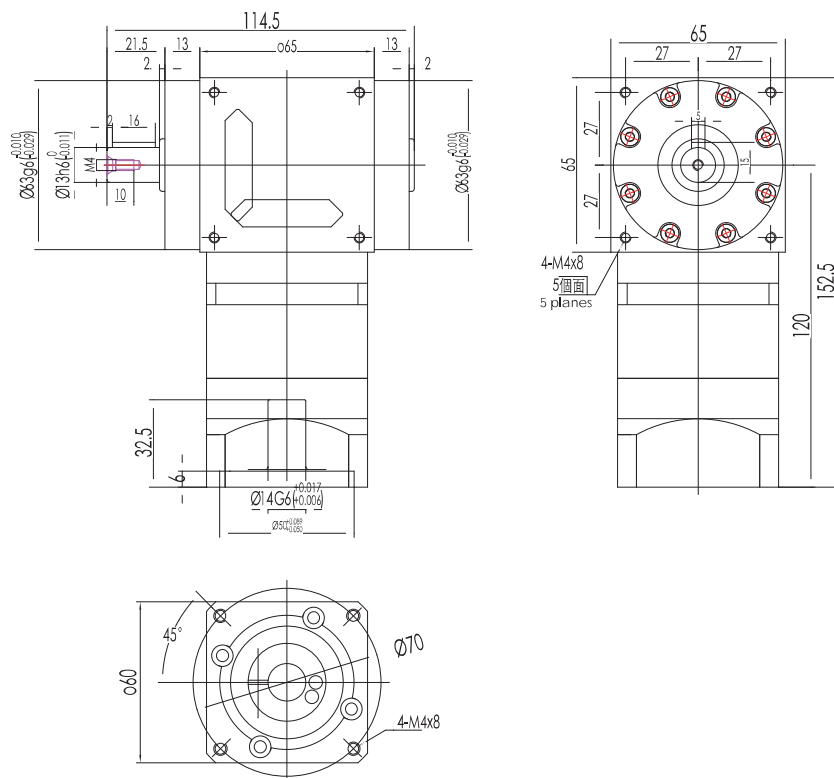


AT065-FL1-12-S2-M200W

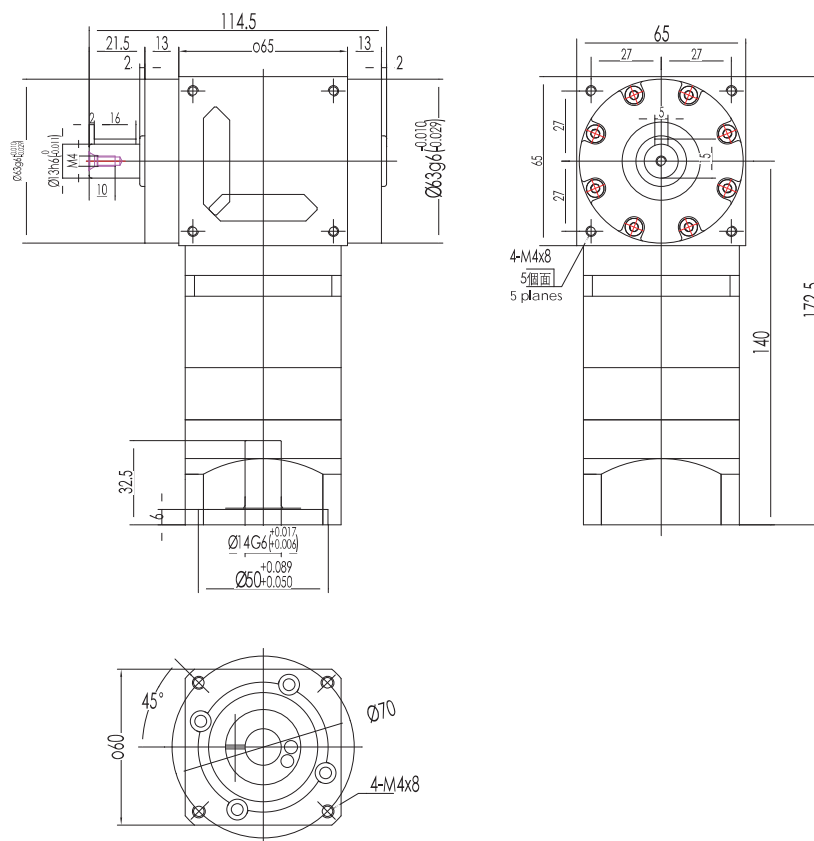

AT065-FH-3-S2-M200W

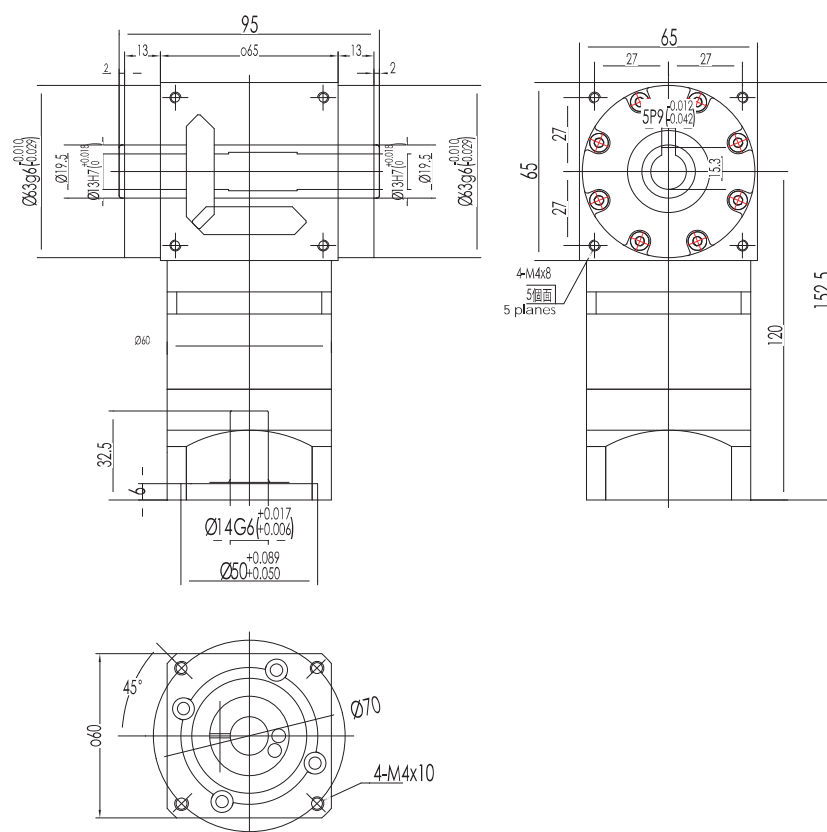

464

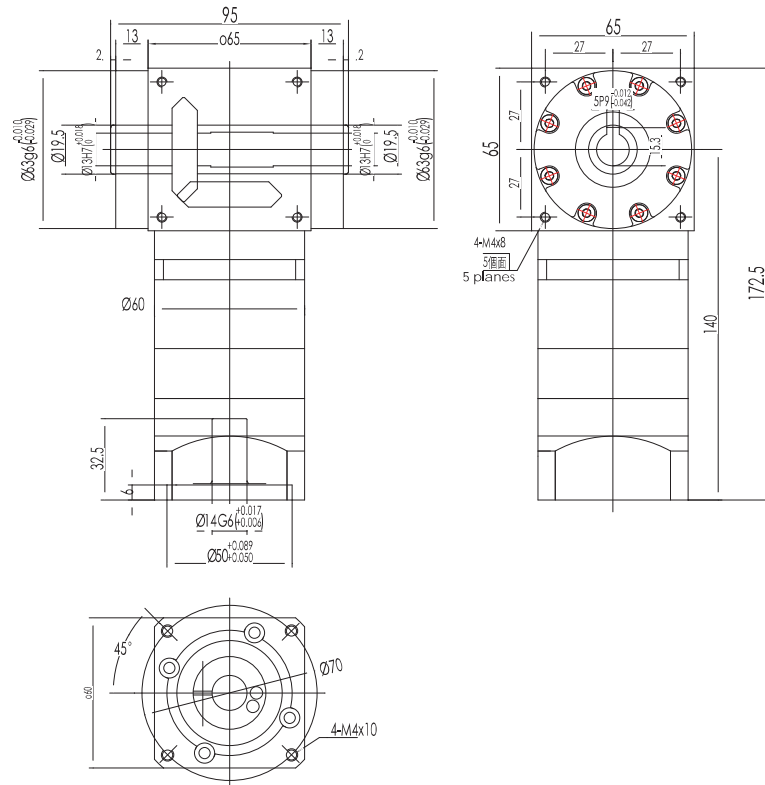



掃碼進入更多選型

AT075 - L - 1 - S2

型號
Model

形式
Form

減速比
Reduction ratio


軸帶鍵槽
Shaft with key

L : 雙輸出軸
Two output shafts
L1 : 左輸出軸
Left output shaft
R1 : 右輸出軸
Right output shaft


S1: 無鍵
without key
S2: 有鍵
with key

產品規格 Product specifications	AT075-L-1-S2
減速比 Reduction ratio	1:1
額定輸出力矩 Rated output torque	45 N.m
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque
額定輸入轉速 Rated input speed	1500 rpm
容許徑向力 Allowable radial force	1100 N
容許軸向力 Allowable axial force	550 N
回程間隙 Return clearance	≤ 6 arcmin
使用壽命 service life	> 20000 h
使用溫度 Service temperature	-10°C~80°C


AT075-L-1-S2

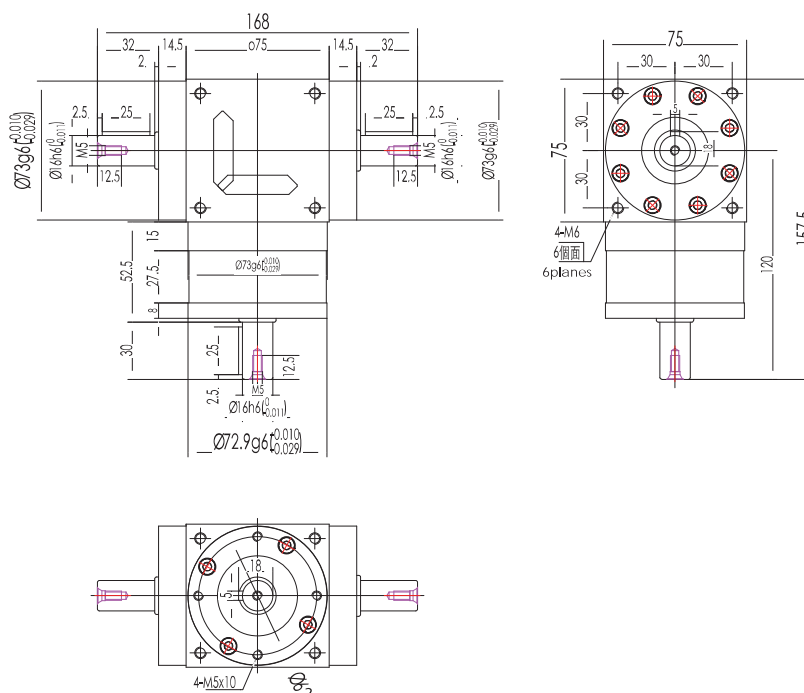

AT075-L1-1-S2

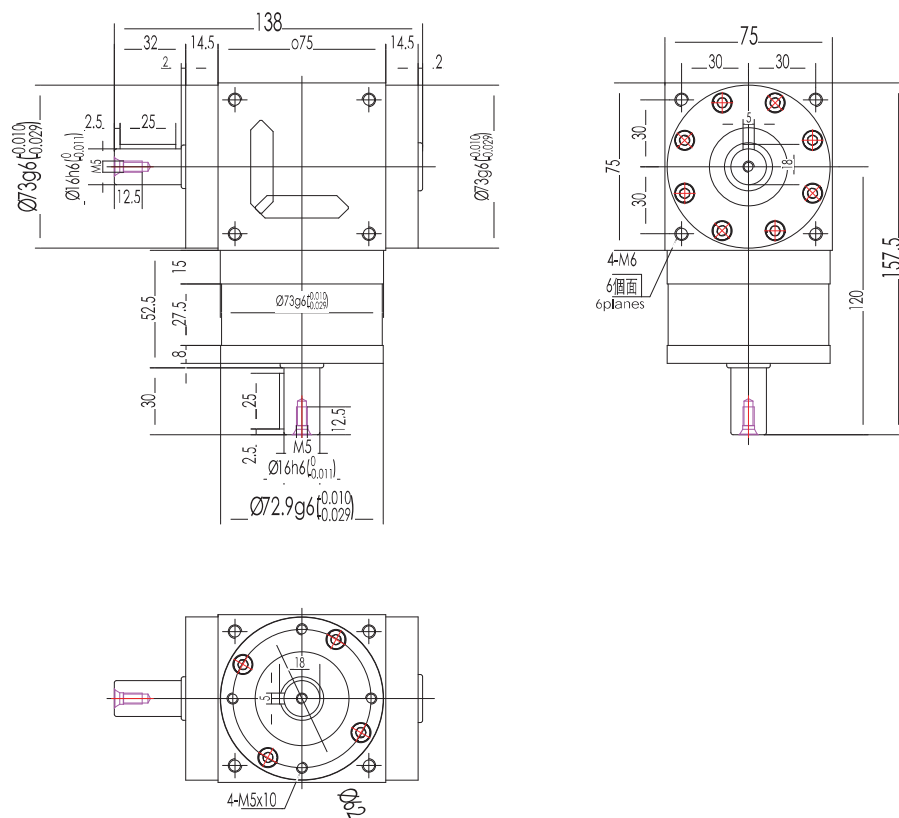

AT075-R1-1-S2

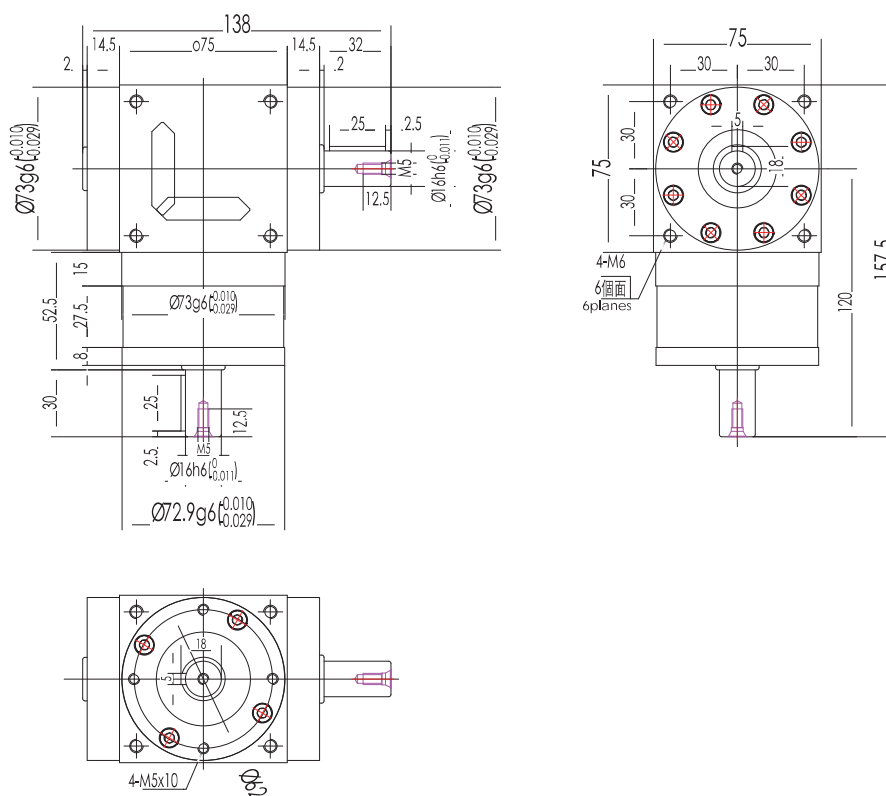

馬達廠牌及出力
Motor brand and output


S1: 無鍵 ————
without key
S2: 有鍵 ————
with key

H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta


AT075-FL-3-S2-M400W




AT075-FL-12-S2-M400W

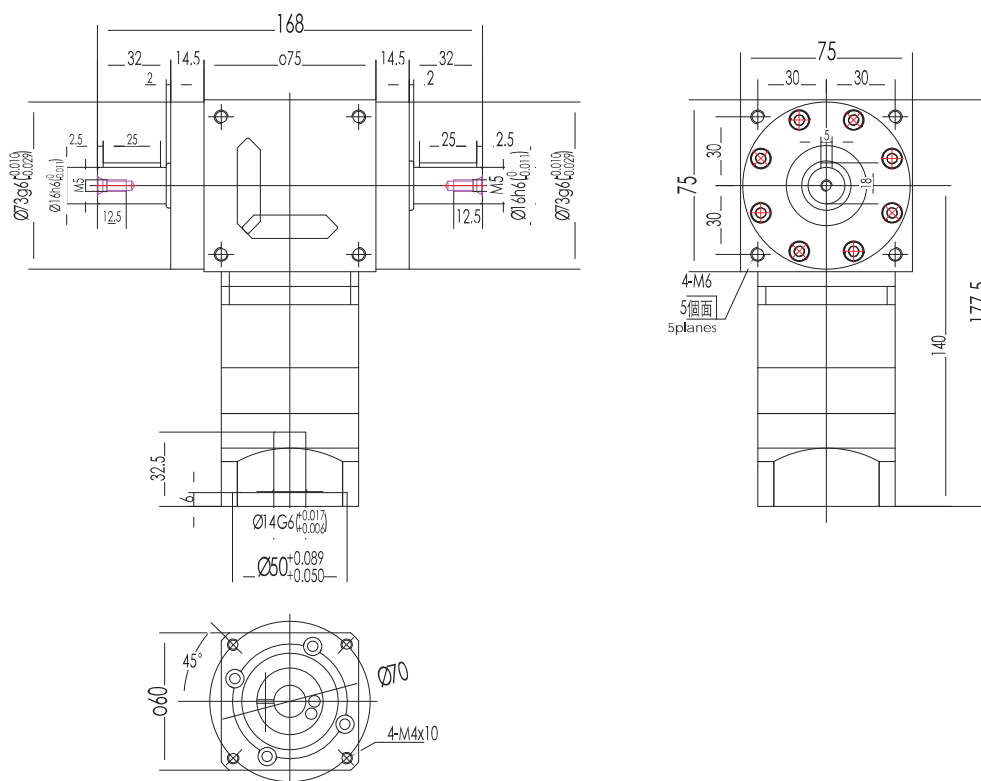


AT075-FL1-3-S2-M400W

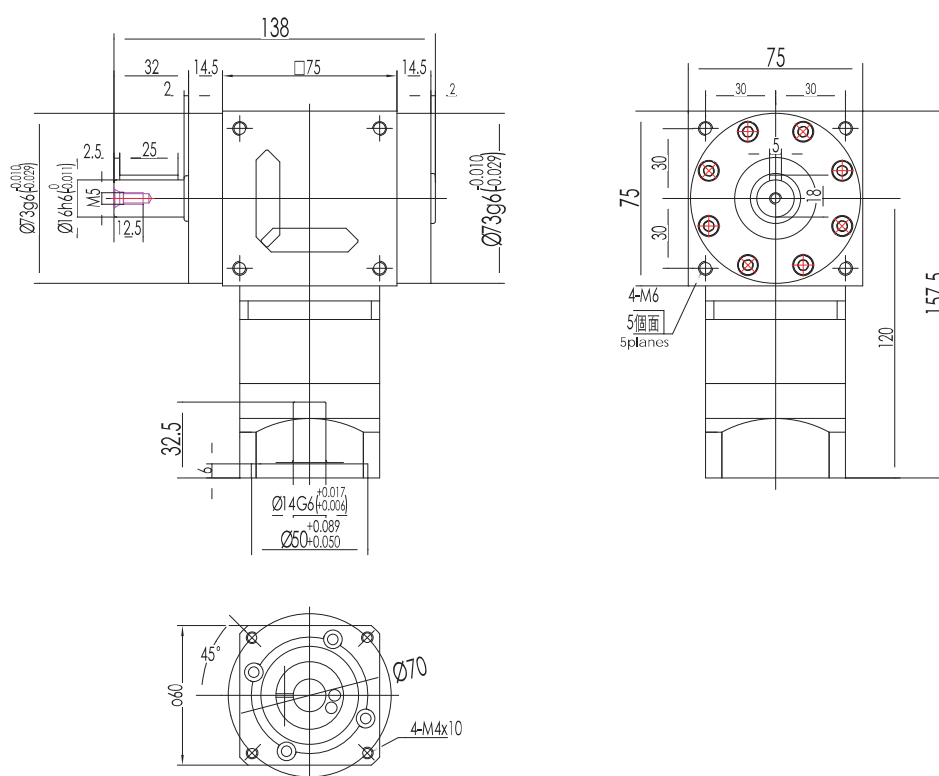

AT075-FH-3-S2-M400W

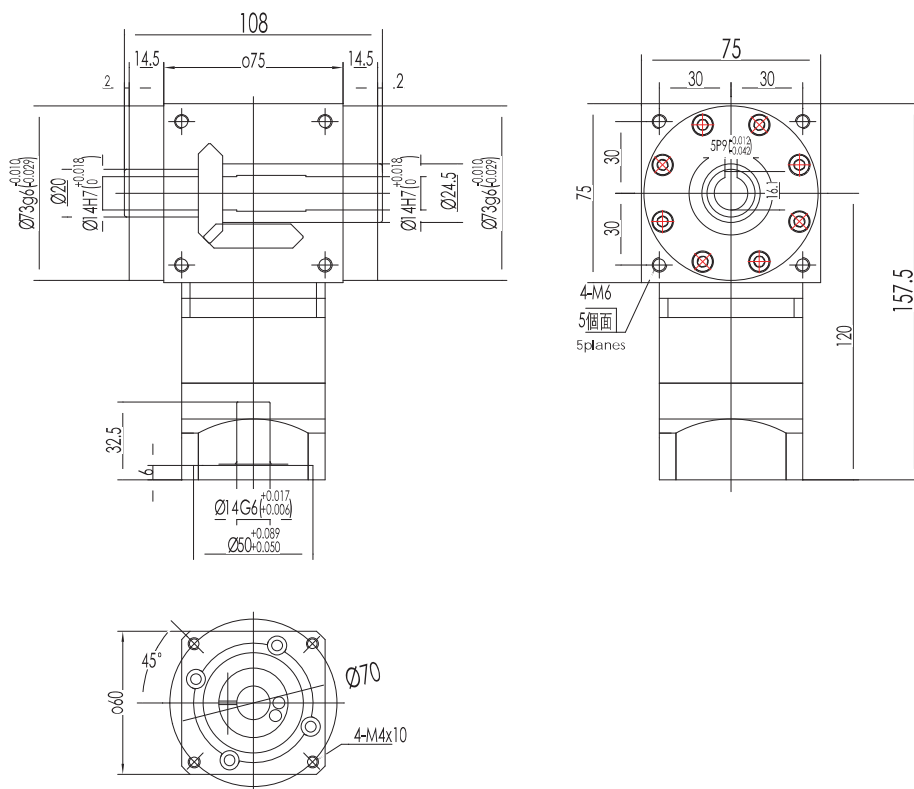

470

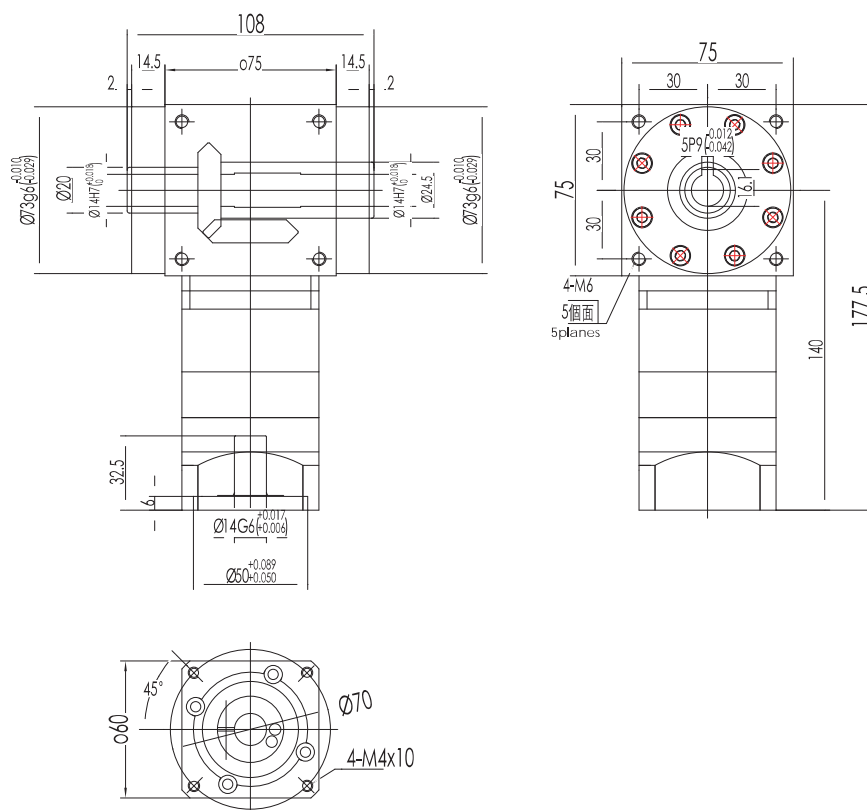




軸帶鍵槽
Shaft with key

S1: 無鍵 — without key
S2: 有鍵 — with key


AT090-L-1-S2



AT090-L1-1-S2

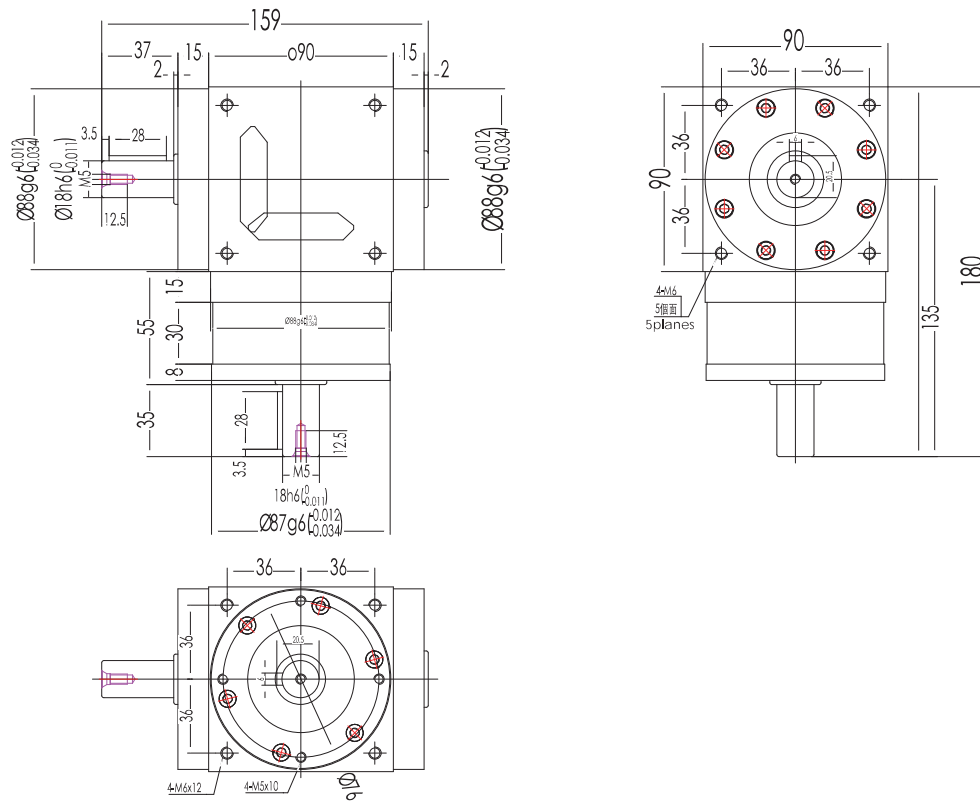

AT090-R1-1-S2

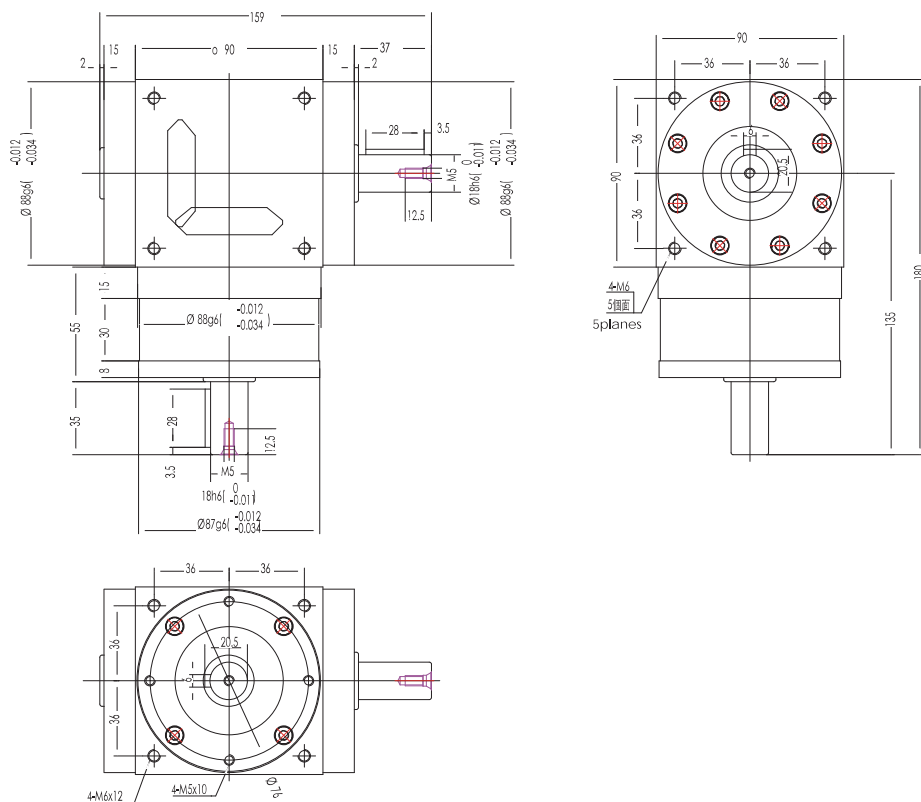


馬達廠牌及出力
Motor brand and output

S1: 無鍵 -
without key
S2: 有鍵 -
with key


H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

產品規格 Product specifications	AT090-FL-3-S2-M750W	
減速比 Reduction ratio	3,4,5,7,10	12~100
額定輸出力矩 Rated output torque	78 N.m	
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque	
額定輸入轉速 Rated input speed	3000 rpm	
容許徑向力 Allowable radial force	1700 N	
容許軸向力 Allowable axial force	850 N	
回程間隙 Return clearance	≤ 10 arcmin	
使用壽命 service life	> 20000 h	
使用溫度 Service temperature	-10℃~80℃	


AT090-FL-3-S2-M750W

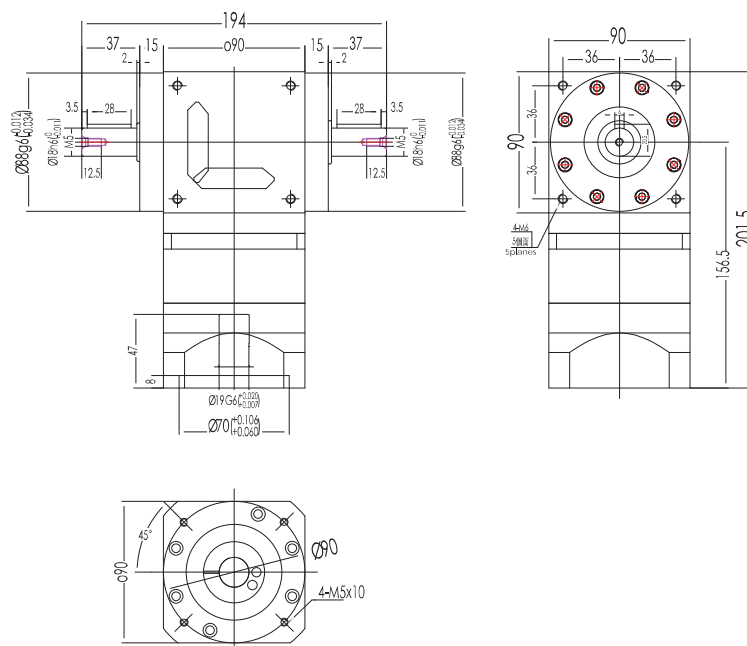


AT090-FL-12-S2-M750W

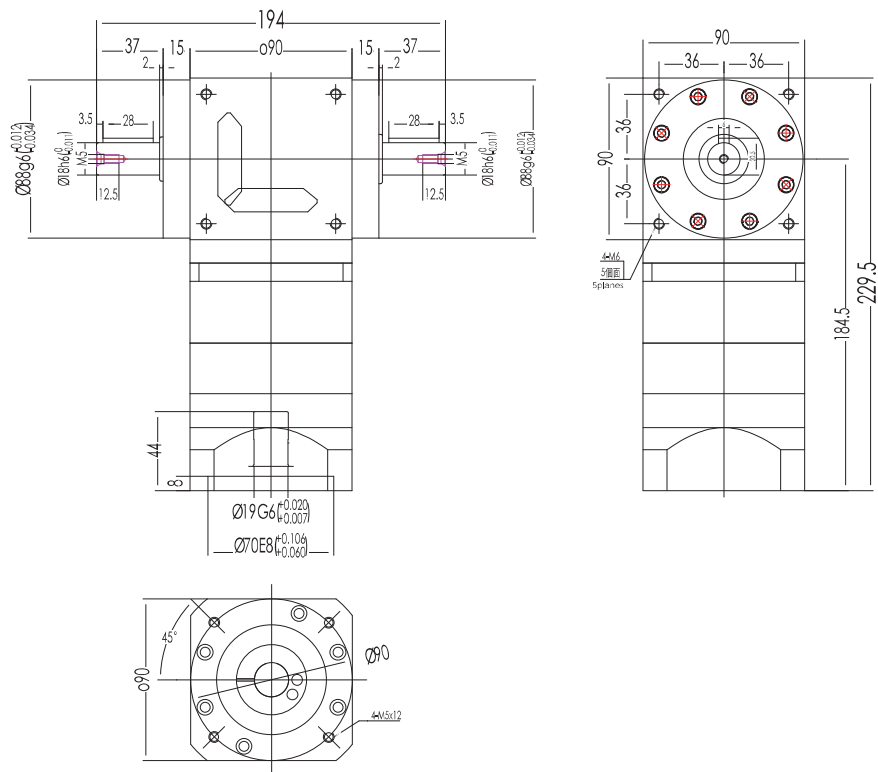


AT090-FL1-3-S2-M750W

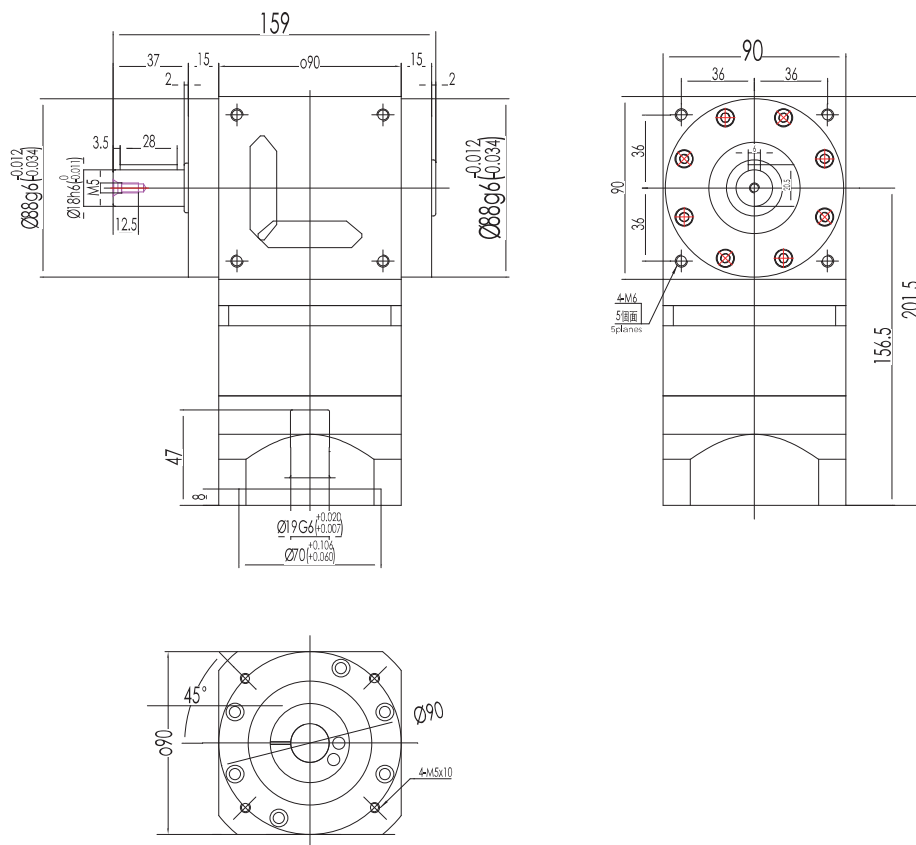


AT090-FL1-12-S2-M750W

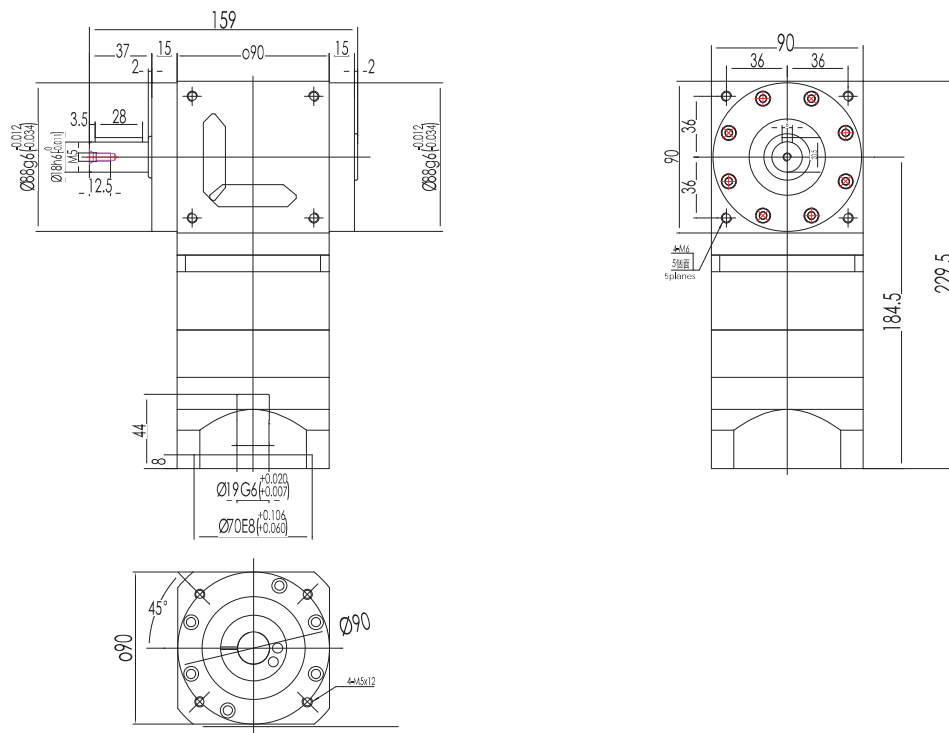

AT090-FH-3-S2-M750W

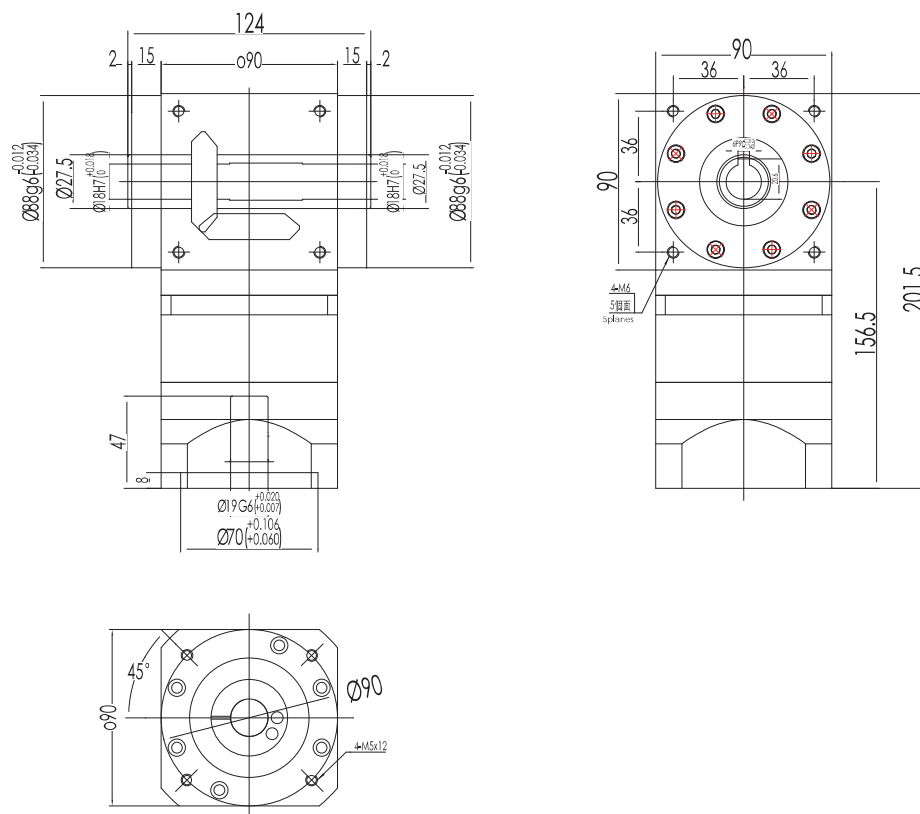

AT090-FH-12-S2-M750W

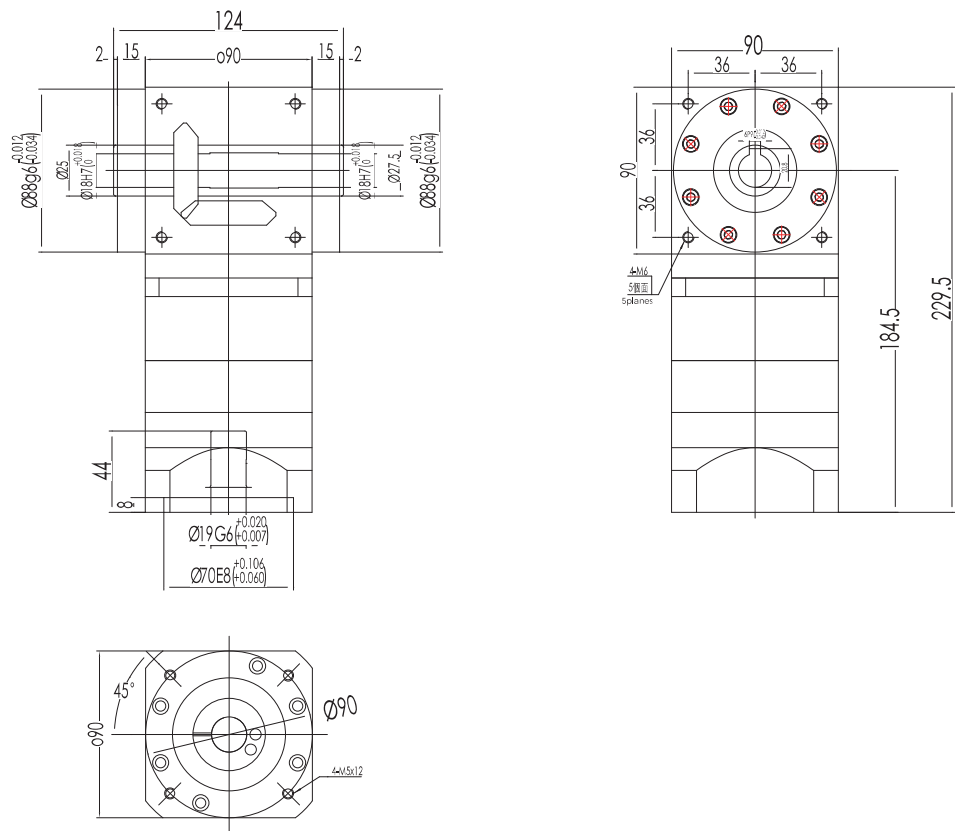





L : 雙輸出軸 — Two output shafts
L1 : 左輸出軸 — Left output shaft
R1 : 右輸出軸 — Right output shaft

S1: 無鍵 — without key
S2: 有鍵 — with key

AT110-L1-1-S2

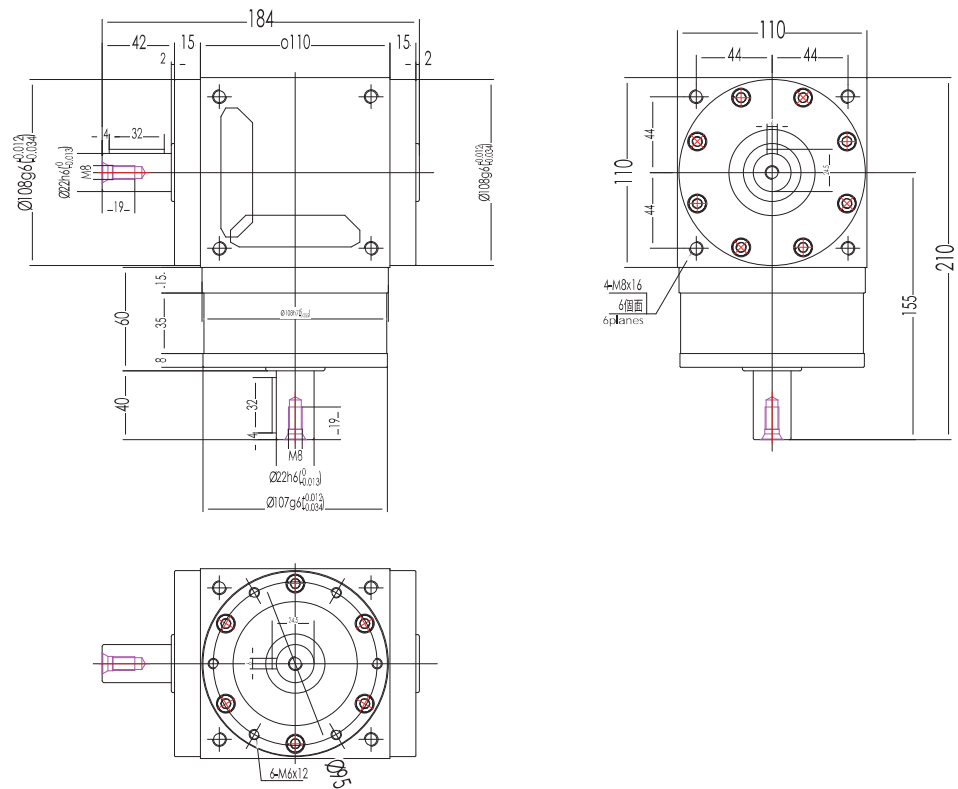

AT110-R1-1-S2

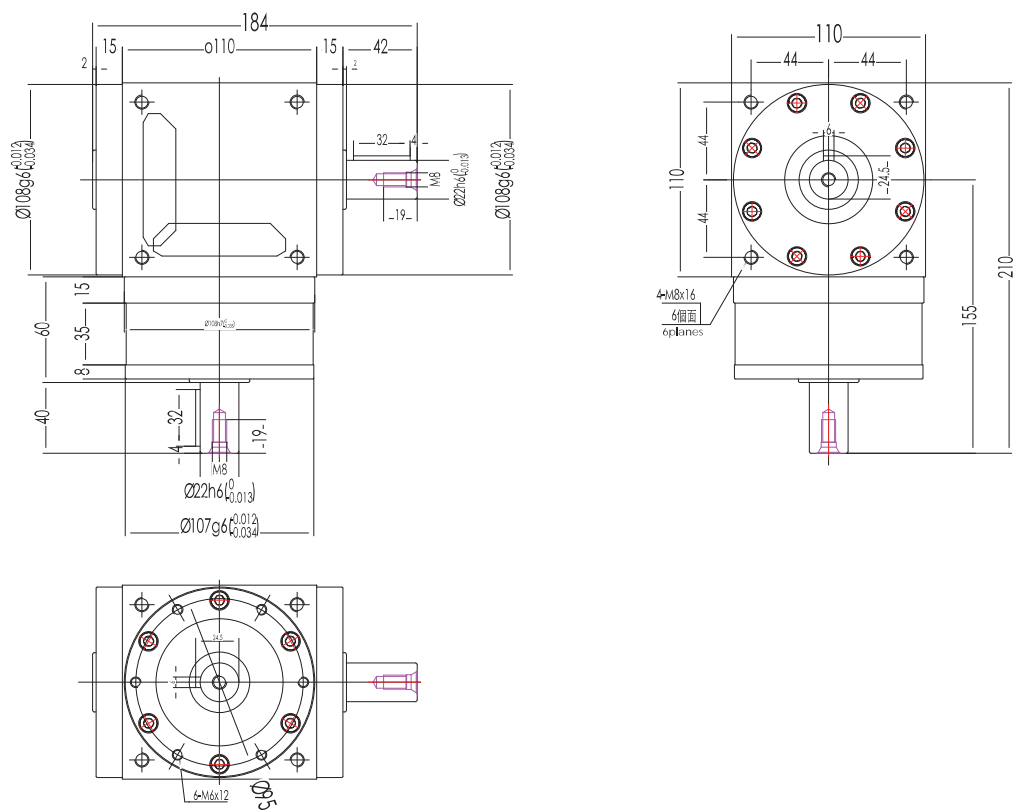



型號
Model

型號
Model

FL:附星型減速機雙輸出軸 – Attached star reducer dual output shaft

FL1 :附星型減速機單輸出軸
Attached star reducer single output shaft

FH:附星型減速機孔輸出式 -
Attached star reducer hole output type

形式
Form

形式
Form

減速比
Reduction ratio

減速比
Reduction ratio

軸帶鍵槽
Shaft with key

軸帶鍵槽
Shaft with key

S1:無鍵 —

S2: 有键 —
with key

think,

馬達廠牌及出力
Motor brand and output馬達廠牌及出力
Motor brand and output

- H 上銀 Hiwin
- X 西門子 Siemens

M 三菱 Mitsubishi
Y 安川 Yaskawa



P 松下 Panasonic
F 富士 Fuji

T 台達 Delta



AT110-FL-3-S2-M750W




AT110-FL-12-S2-M750W

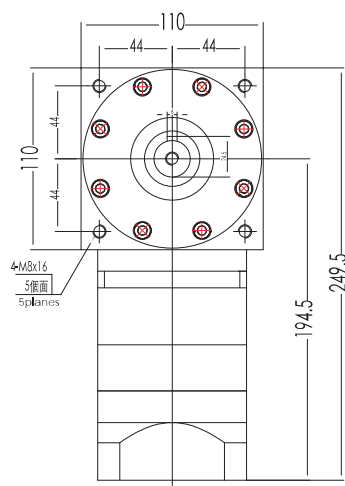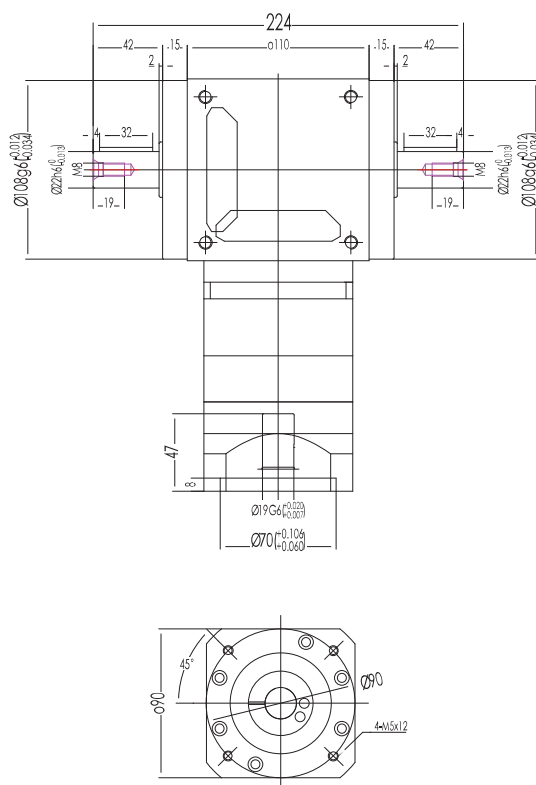


AT110-FL1-3-S2-M750W

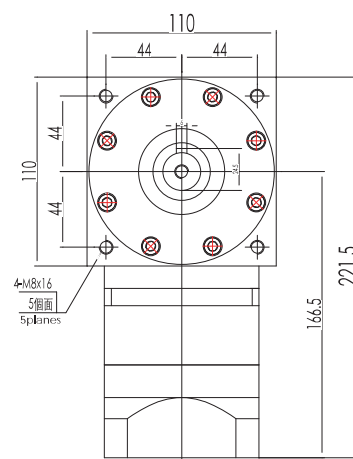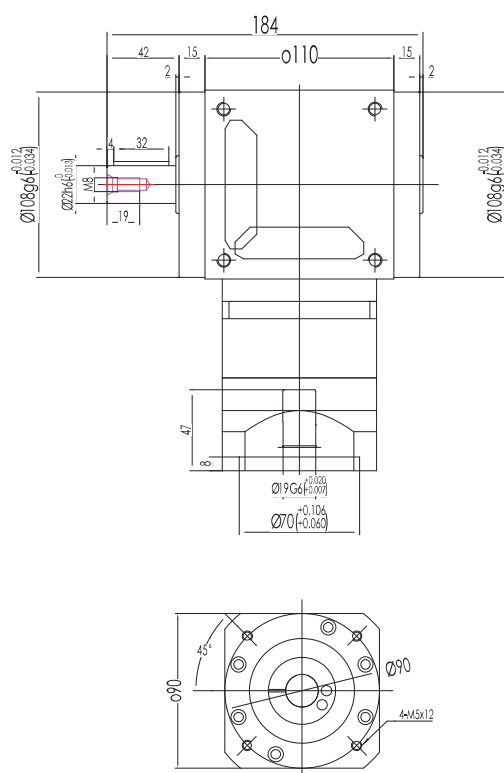


AT110-FL1-12-S2-M750W

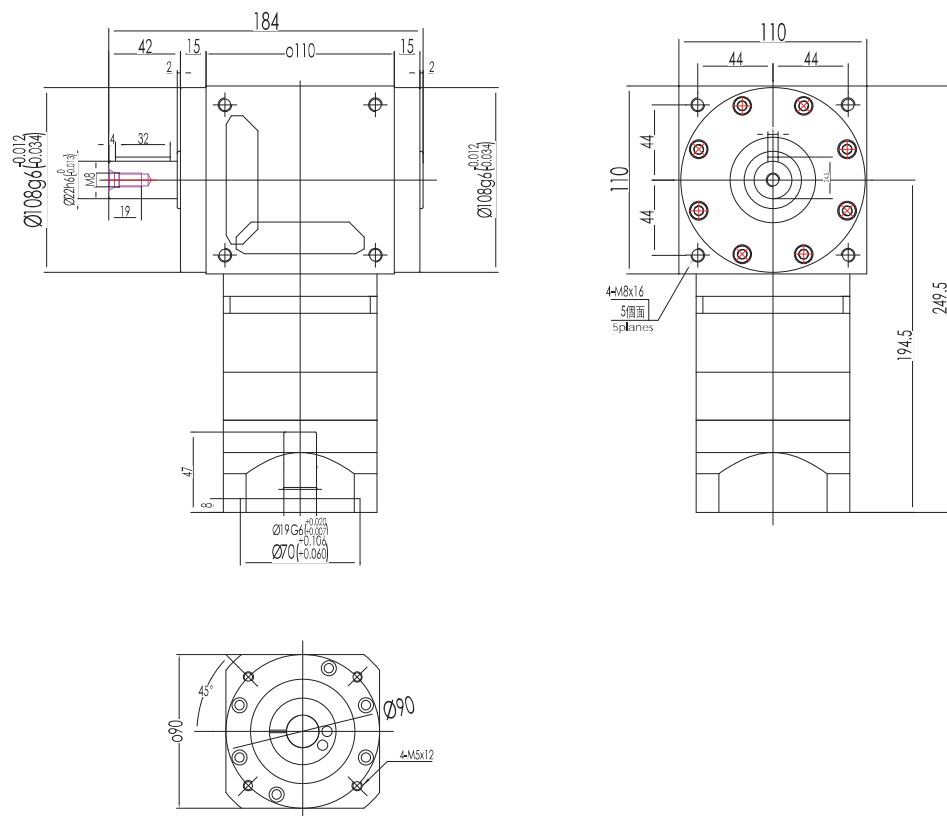

AT110-FH-3-S2-M750W

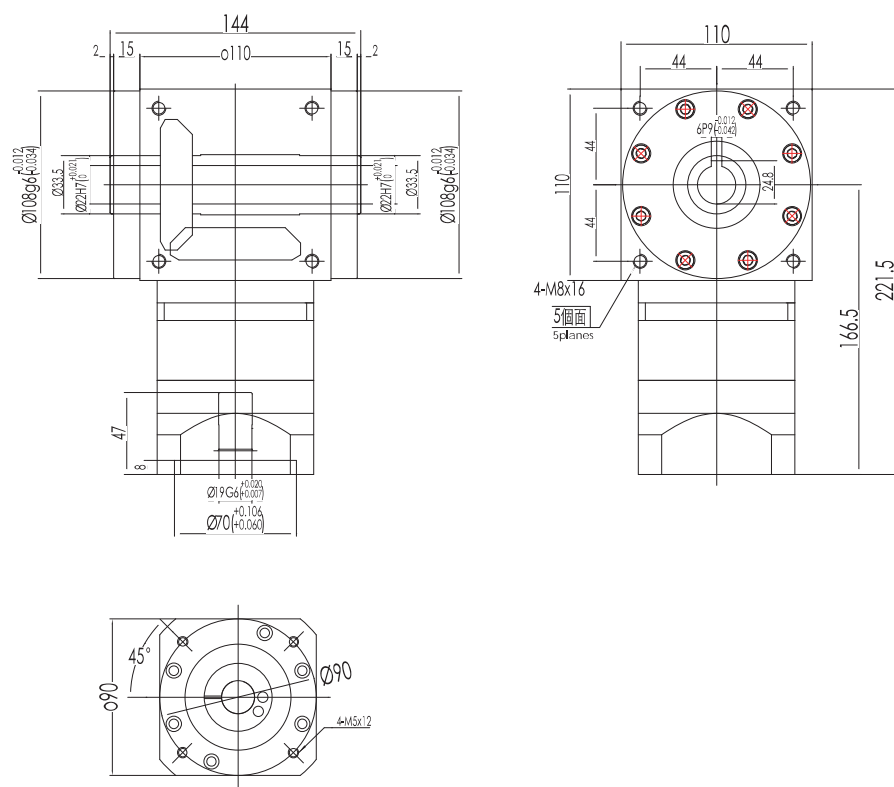

482

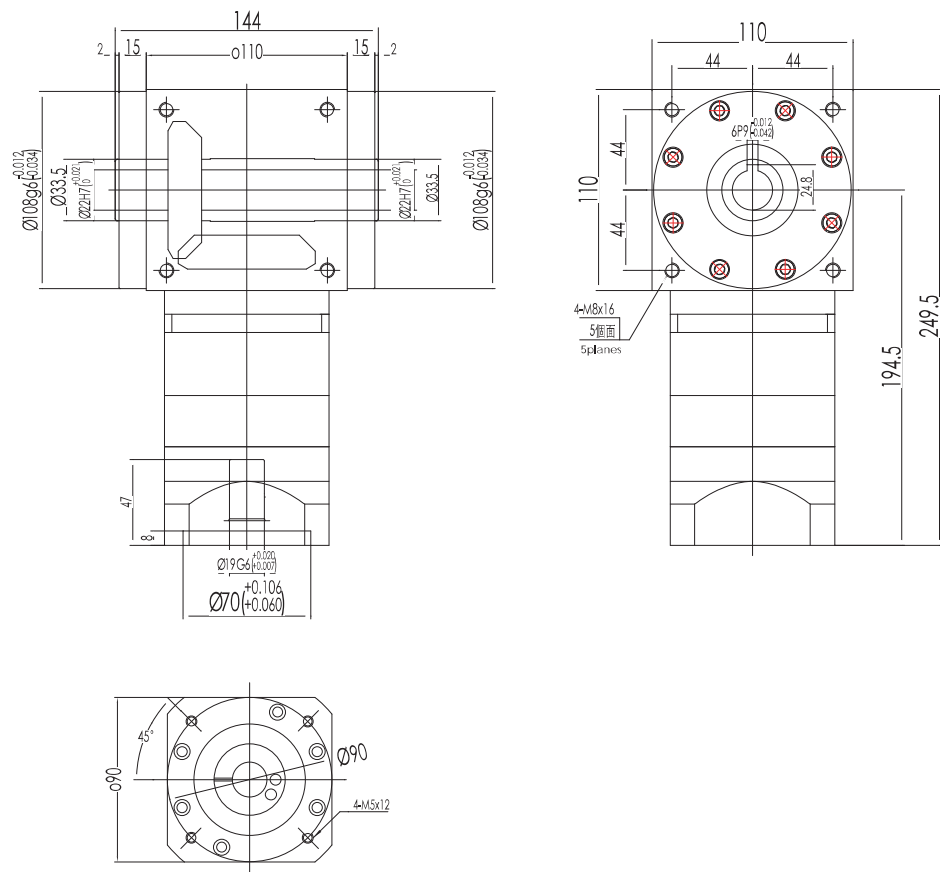



掃碼進入更多選型

AT140 - L - 1 - S2

型號
Model

形式
Form

減速比
Reduction ratio



軸帶鍵槽
Shaft with key

L: 雙輸出軸
Two output shafts
L1: 左輸出軸
Left output shaft
R1: 右輸出軸
Right output shaft


S1: 無鍵
without key
S2: 有鍵
with key

產品規格 Product specifications	AT140-L-1-S2
減速比 Reduction ratio	1:1
額定輸出力矩 Rated output torque	360 N.m
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque
額定輸入轉速 Rated input speed	2000 rpm
容許徑向力矩 Allowable radial force	4800 N
容許軸向力矩 Allowable axial force	2400 N
回程間隙 Return clearance	≤ 6 arcmin
使用壽命 service life	> 20000 h
使用溫度 Service temperature	-10°C~80°C


AT140-L-1-S2

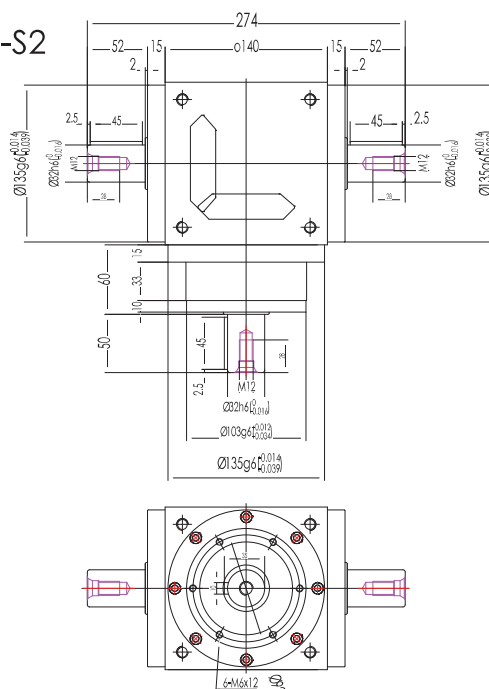

AT140-L1-1-S2

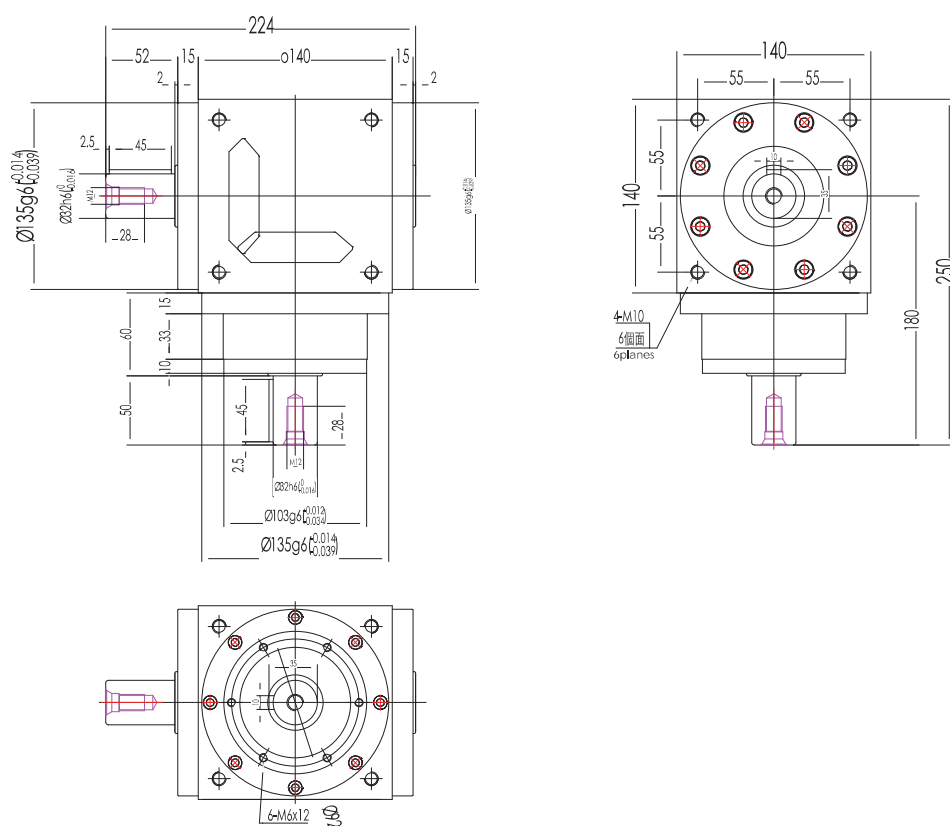

AT140-R1-1-S2

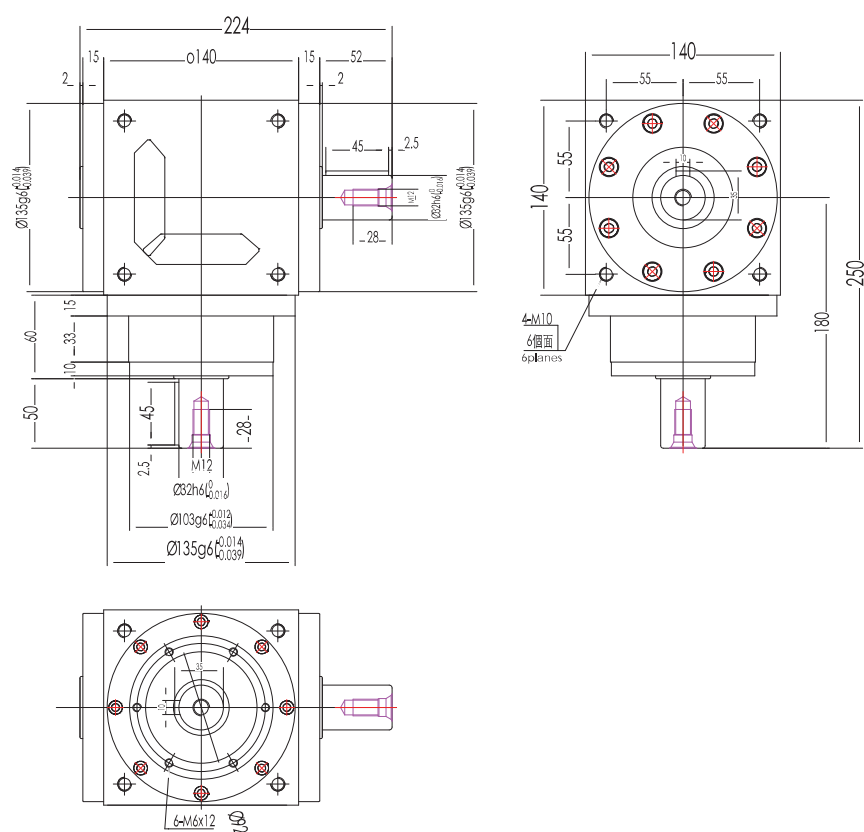



掃碼進入更多選型

AT140 - FL - 3 - S2 - M1500W

型號
Model

形式
Form

減速比
Reduction ratio

軸帶鍵槽
Shaft with key

馬達廠牌及出力
Motor brand and output


FL: 附星型減速機雙輸出軸
Attached star reducer dual output shaft
FL1: 附星型減速機單輸出軸
Attached star reducer single output shaft
FH: 附星型減速機孔輸出式
Attached star reducer hole output type

S1: 無鍵
without key
S2: 有鍵
with key



H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

產品規格 Product specifications	AT140-FL-3-S2-M1500W	
減速比 Reduction ratio	3,4,5,7,10	12~100
額定輸出力矩 Rated output torque	360 N.m	
最大加速力矩 Maximum acceleration torque	1.5倍額定扭矩 1.5 times rated torque	
額定輸入轉速 Rated input speed	2500 rpm	
容許徑向力矩 Allowable radial force	4800 N	
容許軸向力矩 Allowable axial force	2400 N	
回程間隙 Return clearance	≤ 10 arcmin	
使用壽命 service life	> 20000 h	
使用溫度 Service temperature	-10℃~80℃	

AT140-FL-3-S2-M1500W

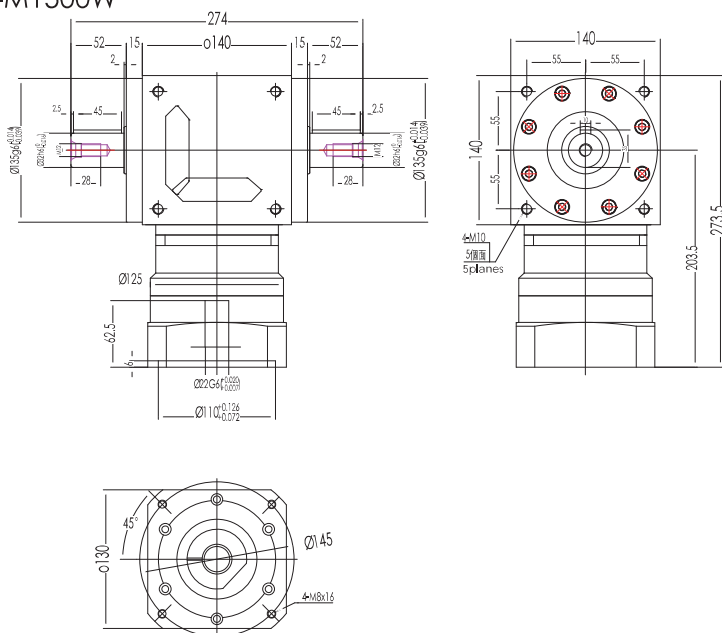

AT140-FL1-3-S2-M1500W

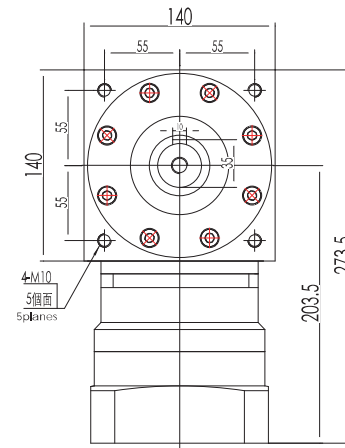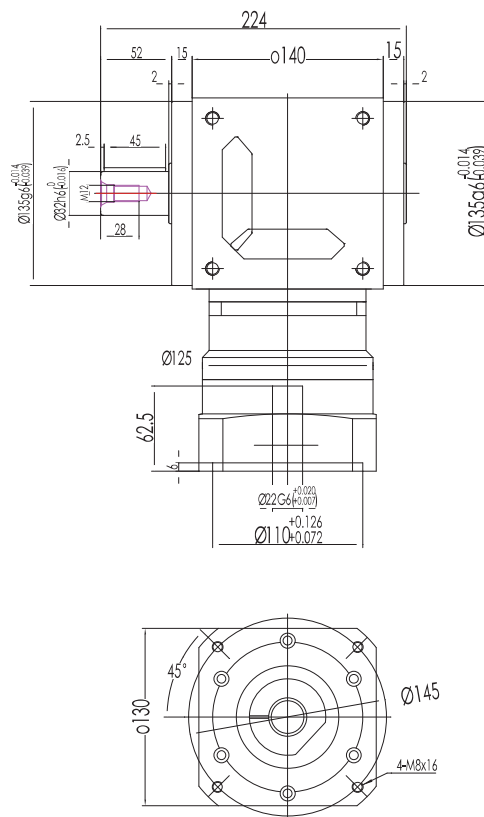

AT140-FH-3-S2-M1500W

